



anovafurnishings.com
888.535.5005 tel

TOOLS NEEDED:

- 9/16" Open-end or box end-wrench
- Ratchet with 9/16" socket
- #4 Phillips screwdriver
- Level

Assembly Instructions

Rendezvous

L1360 - Rendezvous 6' Contour Bench

L1360A - Rendezvous 6' Contour Bench with Center Armrest

L1361 - Rendezvous 4' Contour Bench

L1504 - Horizon 4' Contour Bench

L1506 - Horizon 6' Contour Bench

L1506A - Horizon 6' Contour Bench with Center Armrest




Rendezvous 6' Contour Bench



Horizon 6' Contour Bench

COMPONENT PARTS:



(1) Contour Bench Seat
(Pattern may vary)




(2) End Castings



(1) Center Armrest Models
L1360A and L1506A Only

ASSEMBLY HARDWARE: All hardware is stainless steel.
NOTE: Hardware arrives in two packages; one with each end casting.



(4) 3/8"-16 x 1 1/2"
Phillips Head Screws




(4) 3/8"-16
Nylock Nuts



(4) 3/8" Flat
Washers

**Additional Hardware Included
only in Model L1360A and 1506A**



(3) 3/8"-16
Nylock Nuts




(3) 3/8" Flat
Washers

ASSEMBLY:

The assembly is a two-person operation.

1. Inspect the shipping container contents for damage and to determine that all components and hardware are present.
2. Lay all parts on a soft work surface or on the shipping packaging to prevent damage to finish.

NOTE: Before assembling the nuts to the bolts, it is recommended that a light oil or petroleum jelly be applied to the screw threads.

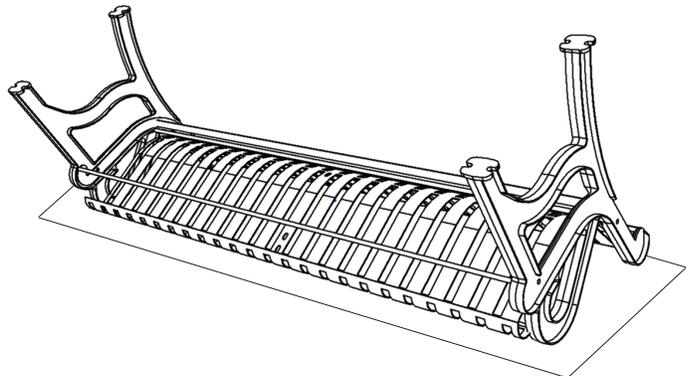

- Align the mounting holes in one of the end castings with the holes in the appropriate end of the bench seat. Insert one of the 3/8"-16 x 11/2" Phillips head screws through both parts, with the screw head on the outside surface of the end casting. Place a 3/8" flat washer and 3/8"-16 nylock nut on the inside end of the screw and tighten it finger tight.


Repeat this process to install another screw, washer, and nut through the other set of mounting holes on the end casting.

- Repeat step 3 in the same manner to install the remaining end casting on the other end of the bench seat.

NOTE: Always hold the screw head still and turn the nut. This protects the surface of the bench around the screw from scratches (the washer protects the nut side of the bench)



- Tighten the bench seat hardware using the #4 Phillips screwdriver and the ratchet with 9/16" socket or 9/16" open-end or box-end wrench while checking the seat surface with a level; minor adjustments can be made while tightening the hardware to make the seat level.

- After two weeks, retighten all of the hardware.

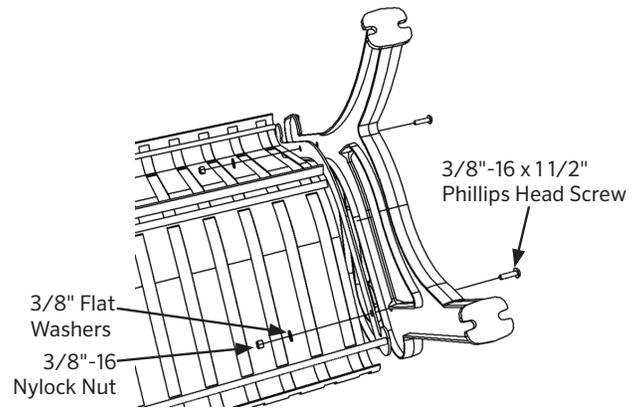

ASSEMBLY: Only applies to Models L1360A and L1506A


- Position the armrest with the threaded studs with the bench seat's center mounting holes and insert it through the mounting holes. Fasten the armrest using one 3/8" flat washer and 3/8"-16 nylock nut on each mounting stud.

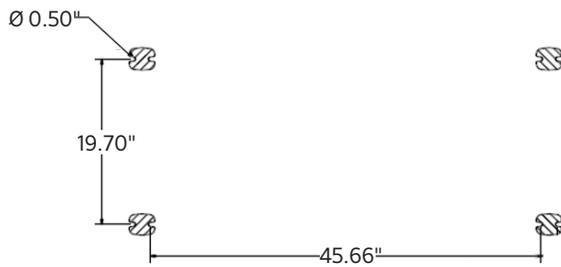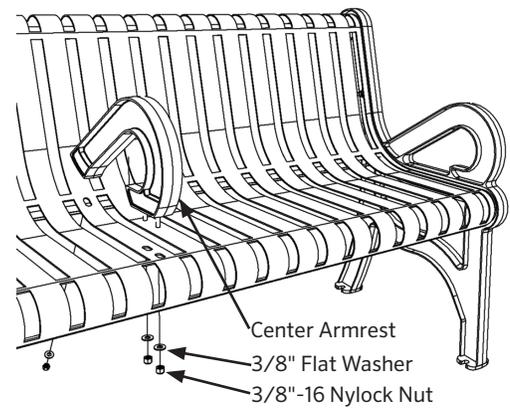

4' Contour Bench



6' Contour Bench

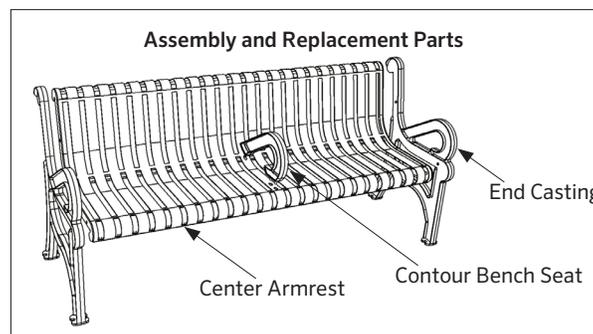

Note: Please contact Customer Care at 1-866-797-1761 when ordering replacement parts.

 WARNING	<ul style="list-style-type: none"> Furniture must not be used other than for its intended purposes and should be inspected regularly for loose, missing, or broken hardware, and general instability. Furniture that is damaged or appears to be unstable must be removed from service and be repaired or replaced. Repairs must be made using only factory authorized parts and methods.
--------------------	--

CARE AND MAINTENANCE	<ul style="list-style-type: none"> Do not drag the assembled unit across any surface. This product requires only periodic cleaning with a sponge and a solution of mild detergent and water to remove surface dirt. Do not clean with a solvent or petroleum based products.
-----------------------------	--